

ACVATIX™

Electromotoric actuators for valves

SAX..



Actuators with 20 mm stroke and 800 N force

- SAX31.. Operating voltage AC 230 V, 3-position control signal
- SAX61.. Operating voltage AC/DC 24 V, positioning signal 0...10V, 4...20 mA
With position feedback, forced control, characteristic changeover
- SAX61../MO operating voltage AC/DC 24 V,
RS-485 for Modbus RTU communication
- SAX81.. Operating voltage AC/DC 24 V, 3-position control signal
- For direct mounting on valves; no adjustments required
- Manual adjuster, position and status indication (LED)
- Optional functions with auxiliary switches, potentiometer, function module, stem heating

Application

Electromotive actuators to operate Siemens 2-port and 3-port valves, types V..F21.., V..F22.., V..F31.., V..F32.., V..F40.., V..F41.., V..F42.., V..F52.., and V..F53.. with 20 mm stroke as control and safety shut-off valves in heating, ventilation and air conditioning systems.

Features

| Function | Description | Type |
|--|--|------------------------|
| 3-position control | A 3-position signal controls the actuator via connection terminals Y1 or Y2. The desired position is transmitted to the valve. | SAX31.., SAX81.. |
| Modulating control | The positioning signal range (DC 0...10 V / DC 4...20 mA / 0...1000 Ω) corresponds to the positioning range (closed...open, or 0...100% stroke) in a linear manner. | SAX61.. |
| Positioning signal and characteristic changeover | Setting with DIL switch. Factory setting: <ul style="list-style-type: none"> Characteristic curve: log = Equal percentage (switch set to Off) Positioning signal: DC 0...10 V (switch set to Off) | |
| Position feedback U | Signal returned to acquire the position via input. | SAX61.., SAX61../MO |
| Forced control (Z-mode) | Forced control helps override automatic mode and is implemented via higher control. | |
| Calibration | Carry out during initial commissioning. The actuator drives to the top or bottom end position; the measured values are saved. | |
| Valve seat detection | The actuators have power-dependent seat detection. After calibration, the exact valve stroke is stored in the actuator's memory. | |
| Foreign body detection | After clogging is detected, three attempts are made to get past clogging. If unsuccessful, the actuator continues to follow the positioning signal only within a limited range, and the LED flashes red. | |
| Modbus RTU (RS-485), not galvanically isolated | Setpoint 0...100 % valve setting Actual value 0..100% for valve position Override control Open / Close / Min / Max / Stop Setpoint monitoring and backup mode | SAX61../MO |

Type summary

| Type | Item NO. | Stroke | Positioning force | Operating voltage | Positioning signal | Spring return time | Positioning time | LED | Manual adjustment ³⁾ | Comment | | |
|---------------------------|------------------|--------|-------------------|--------------------|--------------------|--------------------|--|-----|---------------------------------|---------|---|------|
| SAX31.00 ¹⁾ | S55150-A105 | 20 mm | 800 N | AC 230 V | 3-pos. | - | 120 s | - | Push and fix | - | | |
| SAX31.03 ¹⁾ | S55150-A106 | | | | | | 30 s | - | | 4) | | |
| SAX61.03 ²⁾ | S55150-A100 | | | yes | 5) | | | | | | | |
| SAX61.03U ²⁾ | S55150-A100-A100 | | | | | | DC ...10 V DC 4...20 mA 0...1000 Ω | - | | | | |
| SAX61.03/MO ²⁾ | S55150-A140 | | | Modbus RTU | 120 s | | | | | - | | |
| SAX81.00 ²⁾ | S55150-A102 | | | DC 24 V DC 24 V | 3-pos. | | - | - | | - | - | |
| SAX81.03 ²⁾ | S55150-A103 | | | | | | | | | | | 30 s |
| SAX81.03U ²⁾ | S55150-A103-A100 | | | | | | | | | | | |

1) Approbation: CE

2) Approvals: CE, UL

3) Not designed for continuous operation.

4) Position feedback, forced control, characteristic changeover

5) Position feedback, forced control

Scope of delivery

Actuators, valves and accessories are supplied in individual packs.

Accessories / spare parts

Electrical accessories

| Type | Auxiliary switch ASC10.51 | Potentiometer ASZ7.5 | Function module AZX61.1 | Stem heating element ASZ6.6 |
|------------|------------------------------|-------------------------|----------------------------|-----------------------------------|
| Item NO. | S55845-Z103 | S55845-Z106 | S55845-Z107 | S55845-Z108 |
| | Max. 2 | | | Max. 1 |
| SAX31.. | Max. 2 | Max. 1 | - | |
| SAX61.. | | - | Max. 1 | |
| SAX61../MO | | - | | |
| SAX81.. | | Max. 1 | - | |




Mechanical accessory

| Type | Weather shield ASK39.1 |
|----------|---------------------------|
| Item NO. | S55845-Z109 |

Ordering (example)

| Type | Order number | Designation | Number of pieces |
|----------|--------------|---------------|------------------|
| SAX81.03 | S55150-A103 | Actuator | 1 |
| ASZ7.5 | S55845-Z106 | Potentiometer | 1 |

Spare parts

| Product no. / SSN | | |
|-------------------|---|---|
| 8000060843 | Housing cover | Screw (valve stem coupling) |
| |  |  |
| | | U-bracket |
| | |  |

Device combinations

2-port valves VV.. (control or safety shutoff valves)

| Valve type | | DN | PN class | k_{vs} [m ³ /h] | Data sheet |
|------------|-------------------|---------|----------|---------------------------------|------------|
| VVF21.. | Flange | 25...80 | 6 | 1.9...100 | N4310 |
| VVF22.. | | | | 2.5...100 | N4401 |
| VVF31.. | | 15...80 | 10 | 1.6...100 | N4320 |
| VVF32.. | | | | 1.6...100 | N4402 |
| VVF40.. | | | | 1.9...100 | N4330 |
| VVF41.. | | 50 | | 19 / 31 | N4340 |
| VVG41.. | Connecting thread | 15...50 | 16 | 0.63...40 | N4363 |
| VVF42.. | Flange | 15...80 | 16 | 1.6...100 | N4403 |
| VVF42..K | | 50...80 | | 40...100 | |
| VVF52.. | | 15...40 | 25 | 0.16...25 | N4373 |
| VVF53.. | | 15...50 | | 0.16...40 | N4405 |

3-port valves VX.. (Control valves for functions "mixing" and "distribution")

| Valve type | | DN | PN class | k_{vs} [m ³ /h] | Data sheet |
|------------|-----------|-------------------|----------|---------------------------------|------------|
| VXF21.. | Flange | 25...80 | 6 | 1.9...100 | N4410 |
| VXF22.. | | | | 2.5...100 | N4401 |
| VXF31.. | | 15...80 | 10 | 1.6...100 | N4402 |
| VXF32.. | | | | 1.9...100 | N4430 |
| VXF40.. | | | | 1.9...31 | N4440 |
| VXF41.. | | Connecting thread | 15...50 | 16 | 1.6...40 |
| VXG41.. | 1.6...100 | | | | N4403 |
| VXF42.. | Flange | 15...80 | 25 | 1.6...40 | N4405 |
| VXF53.. | | 15...50 | | 1.6...40 | N4405 |

Product documentation



| Title | Contents | Document ID |
|--|--|--------------|
| Actuators SAX..., SAY..., SAV..., SAL.. for valves | Basic documentation: Detailed information on stroke actuators including Modbus types Stroke actuators for valves with 15/20/40 mm stroke and rotary actuators for butterfly valves | CE1P4040en |
| Electromotive actuators for valves SA..., Modbus RTU | Datasheet: Modbus communication profiles | A6V101037195 |
| Mounting instructions G..161../MO and S..6/MO | Mounting instructions: Mounting and installation instructions for Modbus actuators | A5W00027551 |
| Valve Actuator DIL Switch characteristic overview | Commissioning / configuration: Depictions, description of actuator, and valve characteristics by DIL switch setting [English] | A6V12050595 |

Related documents such as the environmental declarations, declarations of conformity, etc., can be downloaded from the following Internet address:

www.siemens.com/bt/download

Notes

Safety

|  CAUTION | |
|--|--|
|  | <p>National safety regulations</p> <p>Failure to comply with national safety regulations may result in personal injury and property damage.</p> <ul style="list-style-type: none"> Observe national provisions and comply with the appropriate safety regulations. |

⚠ WARNING



Risk of burns from hot actuator brackets

The actuator brackets on heating plants can also become hot from the contact with the hot valve during operation. The temperature of the actuator bracket can reach 100 °C.

When servicing the actuator:

- Switch off both pump and operating voltage.
- Close the main shutoff valve in the piping.
- Allow the piping to cool off.

Engineering

SAX31.. / SAX81..

3-position actuators must be controlled by a controller, see Internal diagrams [▶ 14].

SAX61..

Up to 10 actuators can drive in parallel on a controller output with a rating of 1 mA. Modulating actuators have an input impedance of 100 kΩ.

SAX61../MO

The Modbus converter is designed for analog control at 0...10 V.



Keep the analog signal setting on the actuator as is (switch 1 to OFF); adjustment not permitted.

The actuators are factory configured for equal-percentage characteristic.




DIL switch (internal actuator characteristic changeover) to "log" (switch 2 to "OFF").

ASZ7.5

Actuators with a DC 0...9.8 V feedback signal are recommended for the combination SIMATIC S5/S7 and position feedback.


Signal peaks in potentiometer ASZ7.5 may result in error messages on Siemens SIMATIC. This is not the cause, however, when combined with Siemens HVAC controllers. The reason is the higher resolution and faster reaction time on SIMATIC.

Use the potentiometer as voltage divider on the 3-wire connection. Powering the potentiometer over the wiper may shorten the life cycle of the potentiometer. Signal peaks increase in frequency and scope over the lifespan in this operating mode.

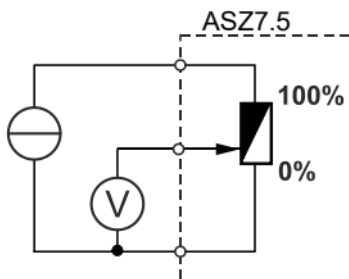

Mounting

Mounting positions

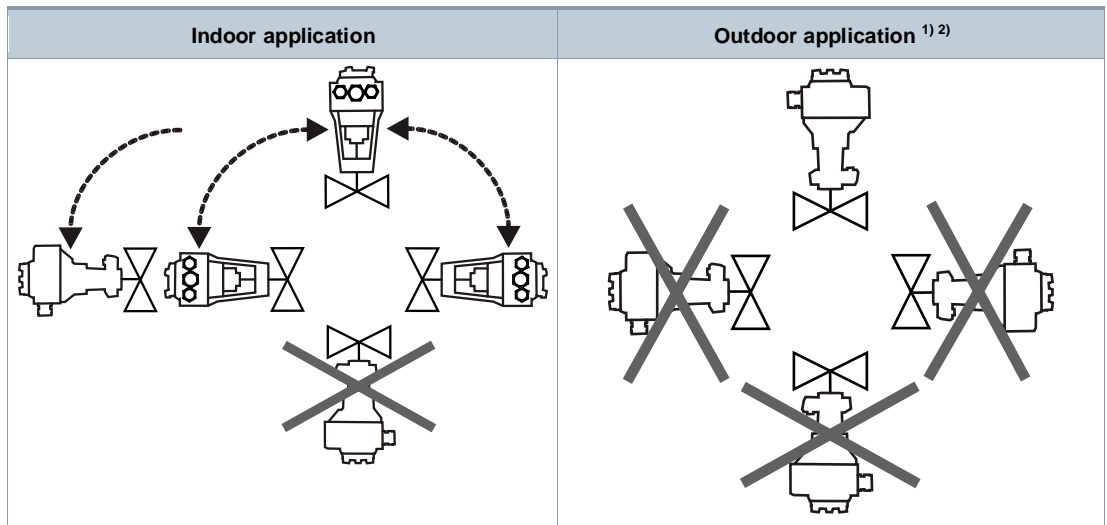


1) Requires weather shield ASK39.1 Housing protection class remains IP 54.

2) SAX61../MO is not intended for outdoor use.

Maintenance

The actuators are maintenance-free.

Disposal

| | |
|---|--|
|  | <p>This symbol or any other national label indicate that the product, its packaging, and, where applicable, any batteries may not be disposed of as domestic waste. Delete all personal data and dispose of the item(s) at separate collection and recycling facilities in accordance with local and national legislation. For additional details, refer to Siemens information on disposal.</p> |
|---|--|

Warranty

The application-specific technical data is guaranteed only in combination with the Siemens products listed in the 'Device combinations' section. If third-party products are used, any guarantee provided by Siemens will be invalidated.

| Power supply | | |
|---|---------|---|
| Operating voltage | SAX31.. | AC 230 V ± 15 % |
| | SAX61.. | AC 24 V ± 20 % / DC 24 V + 20 % / - 15 % (SELV / PELV) |
| | SAX81.. | |
| External supply line fusing (EU) | | <ul style="list-style-type: none"> • Non-renewable fuse 6...10 A slow • Circuit break max. 13 A, tripping characteristic B, C, D to EN 60898 • Power source with current limitation of max. 10 A |
| Fusing per DIN 57100 part 430 (supply line) | | 6...10 A slow |
| Typical switch-on current ¹⁾ (3-position actuators) | SAX31.. | 2.3A |
| | SAX81.. | 4.5A |

| Functional data | | |
|--|--|--------------|
| Positioning time for nominal stroke | The positioning time may vary depending on the type of valve (Type summary [▶ 3]) | |
| | SAX31.00, SAX81.00 | 120 s |
| | SAX31.03, SAX61.03.., SAX81.03.. | 30 s |
| Positioning force | | 800 N |
| Nominal stroke | | 20 mm |
| Working stroke range at which the actuator is calibrated | | 8...23 mm |
| Permissible media temperature (valve fitted) | | -25...130 °C |

| Signal inputs | | |
|------------------------|-------------------------------------|---------------------------------------|
| Positioning signal "Y" | SAX31.., SAX81.. | 3-pos. |
| | SAX31.. Voltage | AC 230 V ± 15 % |
| | SAX81.. Voltage | AC 24 V ± 20% / DC 24 V + 20% / - 15% |
| | SAX61.. (DC 0...10 V) current draw | ≤ 0.1 mA |
| | Input impedance | ≥100 kΩ |
| | SAX61.. (DC 4...20 mA) current draw | DC 4...20 mA ± 1% |
| | Input impedance | ≤ 500 Ω |

| Power consumption at 50 Hz | | | | | |
|----------------------------|------------------|---------------|----------------|-------------|--------------|
| Type | Item NO. | Operating [W] | Operating [VA] | Standby [W] | Standby [VA] |
| SAX31.00 | S55150-A105 | 2.2 | 3.9 | 1.3 | 2.2 |
| SAX31.03 | S55150-A106 | 4.6 | 7.9 | 1.3 | 2.2 |
| SAX61.03 | S55150-A100 | 2.5 | 6.3 | 1.7 | 4.6 |
| SAX61.03U | S55150-A100-A100 | 2.5 | 6.3 | 1.7 | 4.6 |
| SAX61.03/MO | S55150-A140 | 3.0 | 7.0 | 2.2 | 6.0 |
| SAX81.00 | S55150-A102 | 2.3 | 4.0 | 1.5 | 2.7 |
| SAX81.03 | S55150-A103 | 4.3 | 7.2 | 1.5 | 2.6 |
| SAX81.03U | S55150-A103-A100 | 4.3 | 7.2 | 1.5 | 2.6 |

| Communication SAX61../MO | | |
|--------------------------|----------------------|--|
| Communication protocol | Modbus RTU | RS-485, not galvanically isolated |
| | Number of nodes | Max. 32 |
| | Address range | 1...245 / 255 |
| | Factory setting | 255 |
| | Transmission formats | 1-8-E-1 / 1-8-O-1 / 1-8-N-1 / 1-8-N-2 |
| | Factory setting | 1-8-E-1 |
| | Baud rates (kbaud) | Auto / 9.6 / 19.2 / 38.4 / 57.6 / 76.8 / 115.2 |
| | Factory setting | Auto |
| | Bus termination | 120 Ω electronically switchable |
| | Factory setting | Off |

| Parallel connection | |
|---------------------|---------------------------------------|
| SAX61.. | ≤ 10 (depending on controller output) |

| Forced control | | | |
|----------------------|-------------------|---------------------------------|------------------------------|
| Z positioning signal | SAX61.. | R = 0...1000 Ω, G, G0 | |
| | R = 0...1000 Ω | Stroke proportional to R | |
| | Z connected to G | Max. stroke 100 % ²⁾ | |
| | Z connected to G0 | Max. stroke 0 % ²⁾ | |
| | Voltage | | Max. AC 24 V ± 20 % |
| | | | Max. DC 24 V + 20 % / - 15 % |
| | Power consumption | ≤ 0.1 mA | |

| Position feedback | | |
|-------------------|-----------------------|-------------------|
| U | Voltage range SAX61.. | 0...10 V DC |
| | Load impedance | > 10 kΩ resistive |
| | Load | Max. 1 mA |

| Connection cable | | |
|----------------------------|-------------|---|
| Wire cross-sectional areas | | 0.13...1.5 mm ² , AWG 24...16 ³⁾ |
| Cable entries | SAX.. (EU) | 2 entries ø 20.5 mm (for M20) 1 entry ø 25.5 mm (for M25) |
| | SAX..U (US) | 3 entries ø 21.5 mm for ½" tube connection |
| | SAX61../MO | Fixed connection cable 0.9m Number of cores 5 x 0.75 mm ² |

| Degree of protection and class | | |
|--|----------------------|-------------------------------------|
| Housing from vertical to horizontal | | IP 54 as per EN 60529 ⁴⁾ |
| Device protective class per EN 60730-1 | SAX31.. AC 230 V | II |
| | SAX61.. AC / DC 24 V | III |
| | SAX81.. AC / DC 24 V | |

| Environmental conditions | | |
|--|---------------------------|---|
| Operation per IEC 60721-3-3 | Climatic conditions | Class 3K5 |
| | Mounting location | Indoors (weather-protected) ⁴⁾ |
| | Temperature, general | -5...<55 °C |
| | Humidity (non-condensing) | 5...95 % r.h. |
| Transport per IEC 60721-3-2 | Climatic conditions | Class 2K3 |
| | Temperature | -25...70 °C |
| | Humidity | 5...95 % r.h. |
| Storage per IEC 60721-3-1 | Climatic conditions | Class 1K3 |
| | Temperature | -15...55 °C |
| | Humidity | 5...95 % r.h. |
| Max. media temperature when mounted on valve | | 130 °C |

| Directives and standards | |
|--|---|
| Product standard | EN 60730-x |
| Electromagnetic compatibility (field of use) | For residential, commercial, and industrial environments |
| EU conformity (CE) | See EU declaration of conformity CE1T4501X1 ⁵⁾ |

| Directives and standards | | |
|--------------------------|--------------|---|
| UK conformity (UKCA) | | See UK declaration of conformity A5W00185581A-001 ⁵⁾ |
| RCM compliance | | See RCM declaration of conformity CE1T4515X4 ⁵⁾ |
| EAC compliance | | Eurasian compliance for all SAX.. |
| UL, cUL | AC 230 V | - |
| | AC / DC 24 V | UL 873 http://ul.com/database file number E35198 |

| Environmental compatibility |
|--|
| Product environmental declarations 71 7331 0559 ⁵⁾ und A6V101083254 ⁵⁾ include data on environmentally friendly product design and testing (RoHS compliance, material composition, packaging, environmental benefits, disposal). |

| Dimensions |
|------------------------|
| See Dimensions [▶ 17] |

| Accessories | | |
|--|--------------------------|---|
| Potentiometer ASZ7.5 ⁶⁾ 0...1000 Ω ± 5 % | Voltage | DC 10 V |
| | Current rating | <4 mA |
| Auxiliary switch ASC10.51 ⁶⁾ | Switching capacity | AC 24...230 V, 6 (2) A, potential free |
| External fusing of supply line | | <ul style="list-style-type: none"> • Non-renewable fuse 6...10 A slow • Circuit break max. 13 A, tripping characteristic B, C, D to EN 60898 • Power source with current limitation of max. 10 A |
| US installation, UL & cUL | | AC 24 V class 2, 5 A general purpose |
| Stem heating element ASZ6.6 | Operating voltage | AC / DC 24 V ± 20 % |
| | Power draw | 50 VA, 30 W |
| | Switch-on current (cold) | Max. 8.5 A (max. temperature 85 °C/185 F) |


1) Switching time for RMS value of the sine wave at nominal voltage



2) Observe acting direction of DIL switches


3) AWG = American wire gauge

4) For outdoor operation, always use weather shield ASK39.1, housing protection class IP 54 remains as is. SAX61../MO is not intended for outdoor use.

5) Documents can be downloaded at <http://siemens.com/bt/download>.

6)  UL-approved components

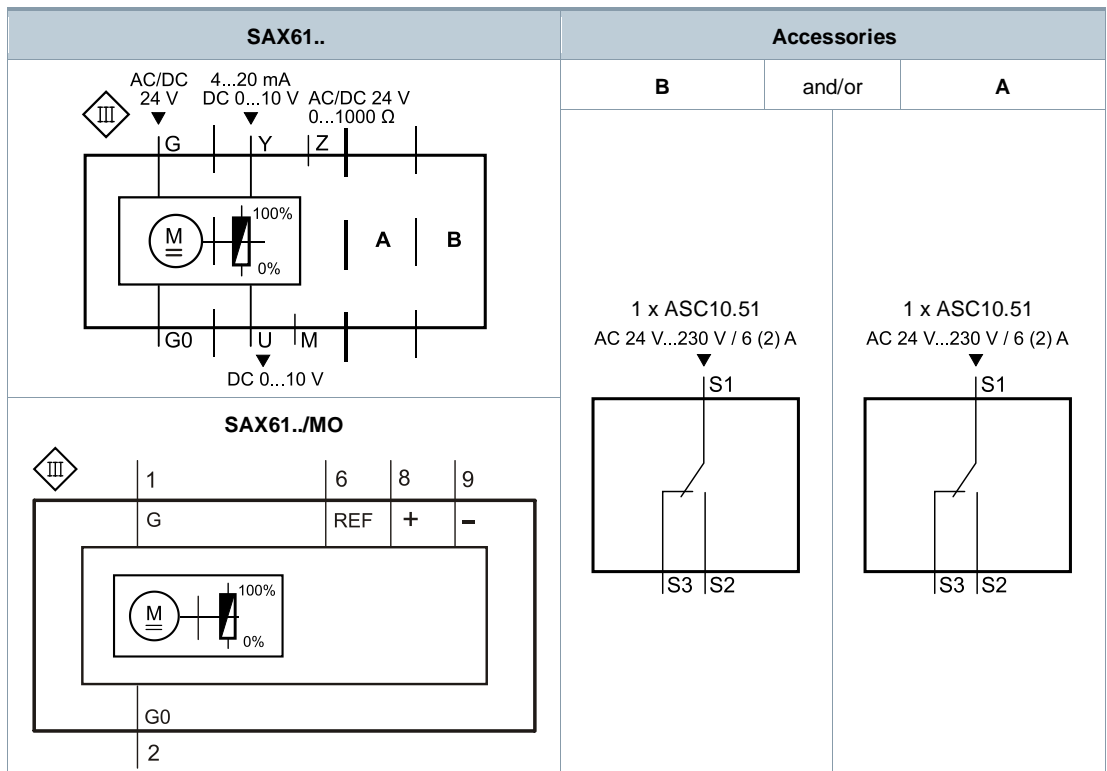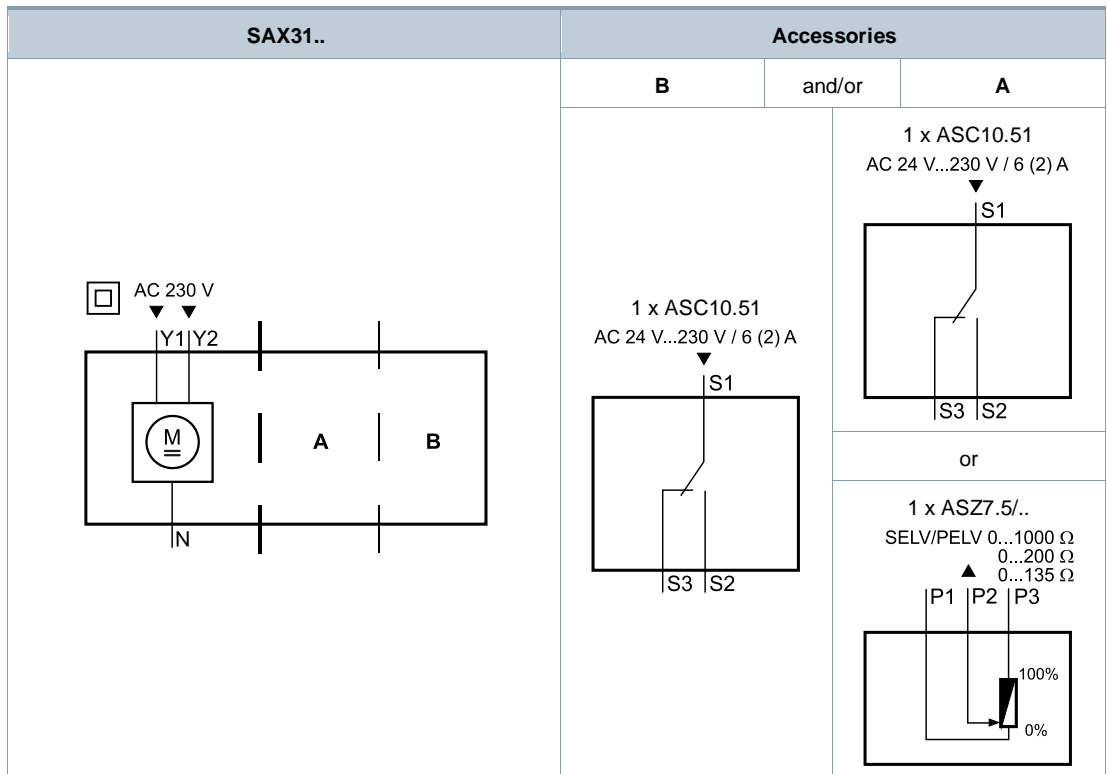

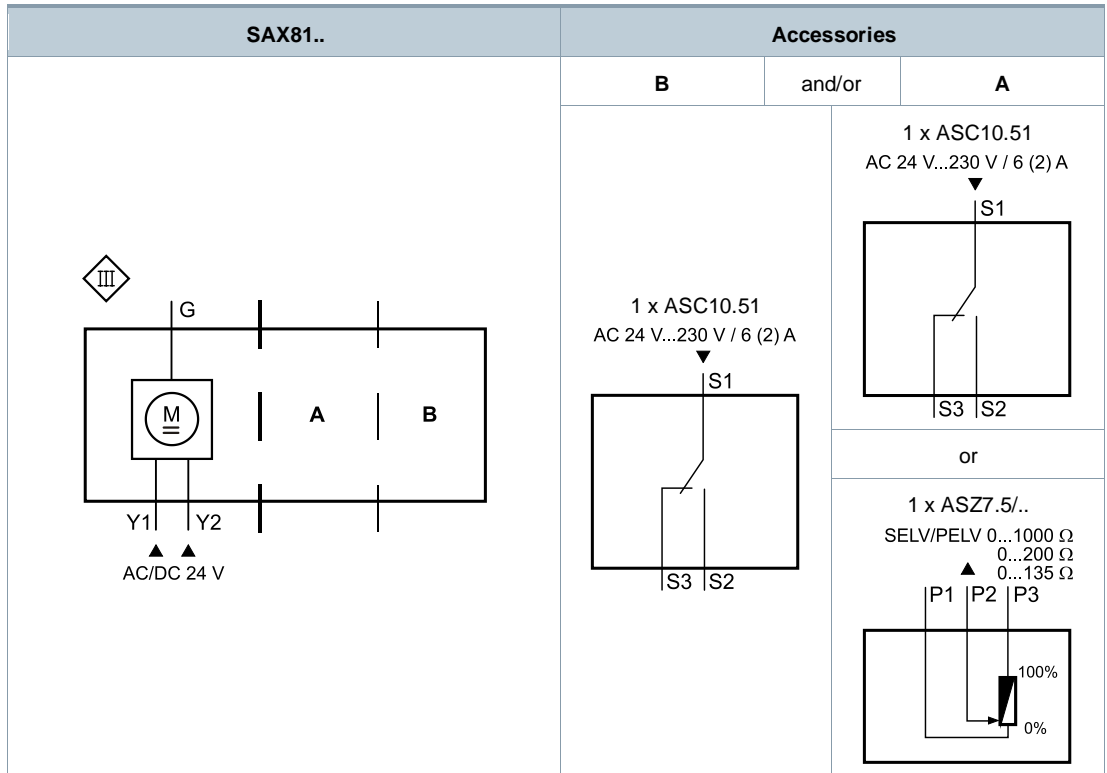

Connection terminals

SAX31..

| | AC 230 V | 3-pos. |
|-----------|---|--------|
| N | System neutral (SN) | |
| Y1 | Positioning signal (actuator's stem retracts) | |
| Y2 | Positioning signal (actuator's stem extends) | |

SAX61..

| | AC / DC 24 V | DC 0...10 V 4...20 mA 0...1000 Ω |
|-----------|--|--|
| G0 | System neutral (SN) | |
| G | System potential (SP) | |
| Y | Positioning signal for DC 0...10 V / 4...20 mA | |
| M | Measuring neutral | |
| U | Position feedback DC 0...10 V - (System neutral is measuring ground M) | |
| Z | Control signal forced control | |

SAX61../MO


| | AC / DC 24 V | Modbus RTU connecting cable |
|------------|---|-----------------------------|
| G0 | System neutral (SN) | black |
| G | System potential (SP) AC 24 V / DC 24 V | red |
| REF | Reference line (Modbus RTU) | purple |
| + | Bus + (Modbus RTU) | gray |
| - | Bus - (Modbus RTU) | pink |

SAX81..


| | AC / DC 24 V | 3-pos. |
|-----------|---|--------|
| G | System potential (SP) | |
| Y1 | Positioning signal (actuator's stem retracts) | |
| Y2 | Positioning signal (actuator's stem extends) | |

Internal diagrams


SAX31..

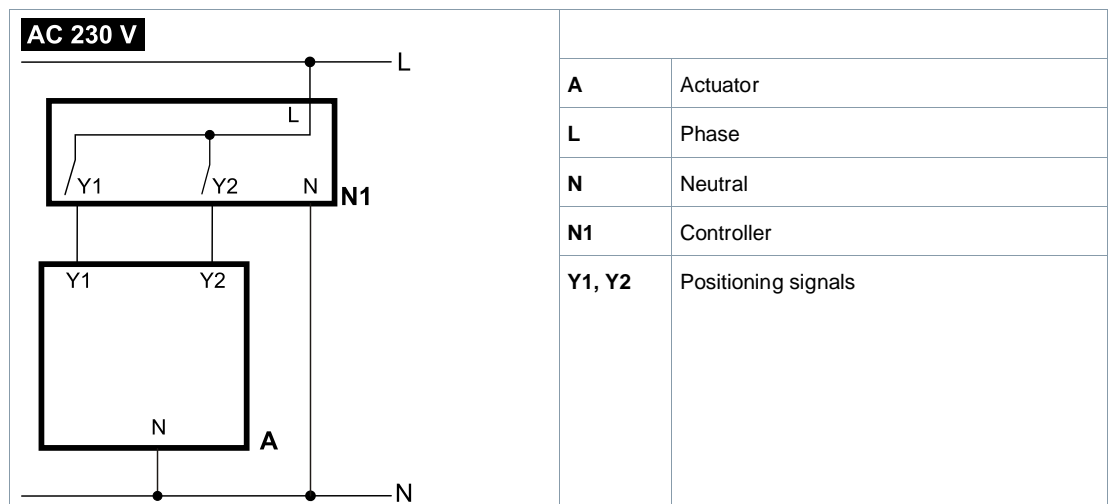


SAX61..

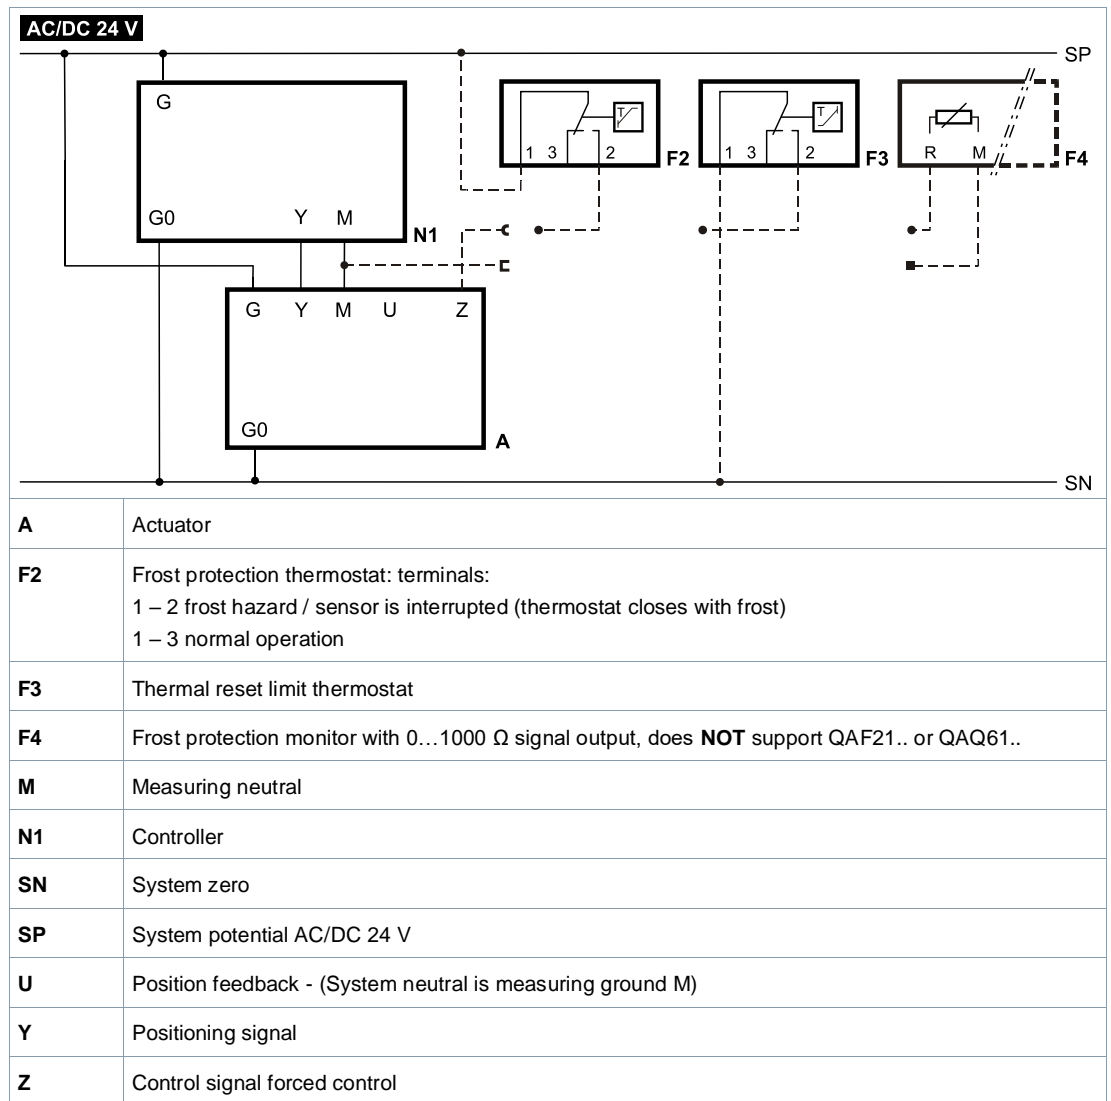


SAX61../MO

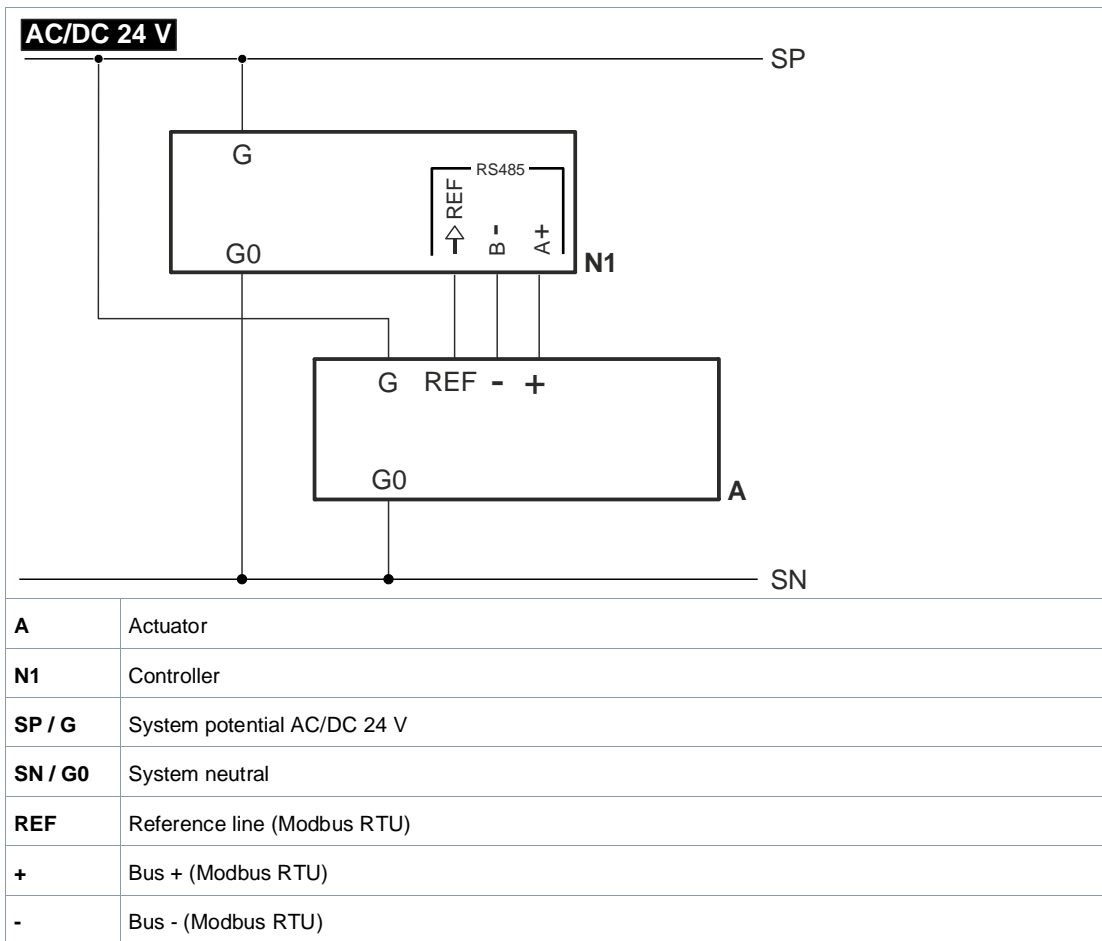

SAX81..

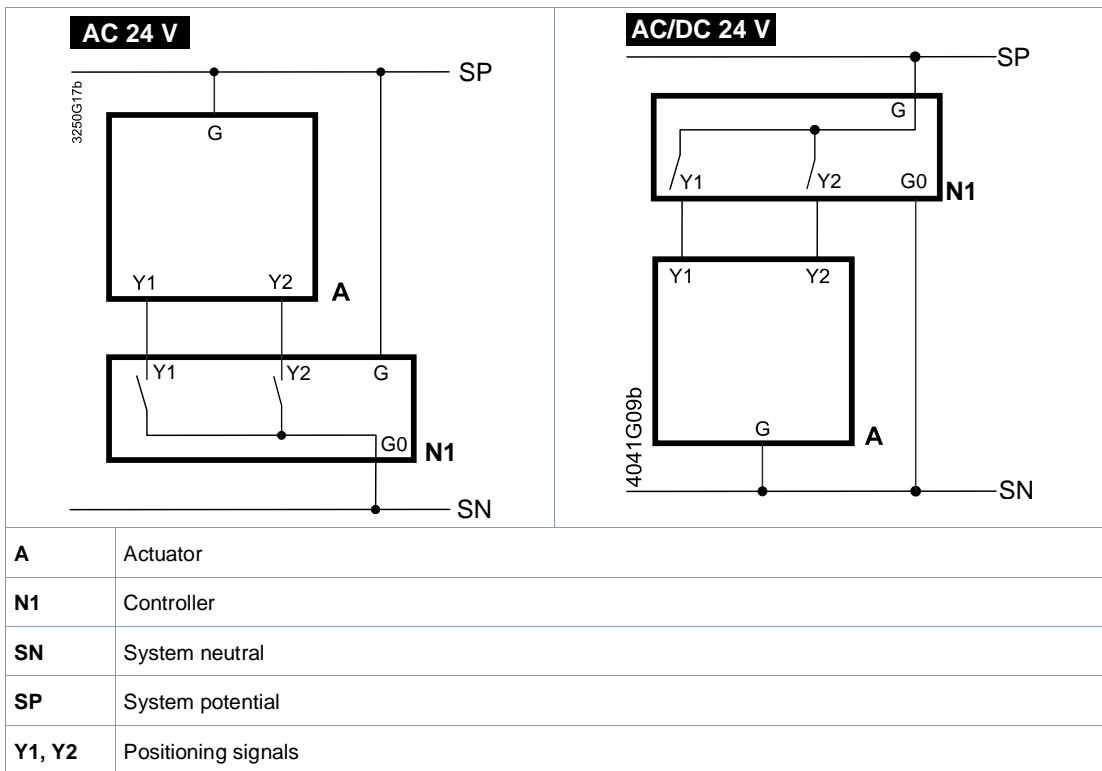

Actuator

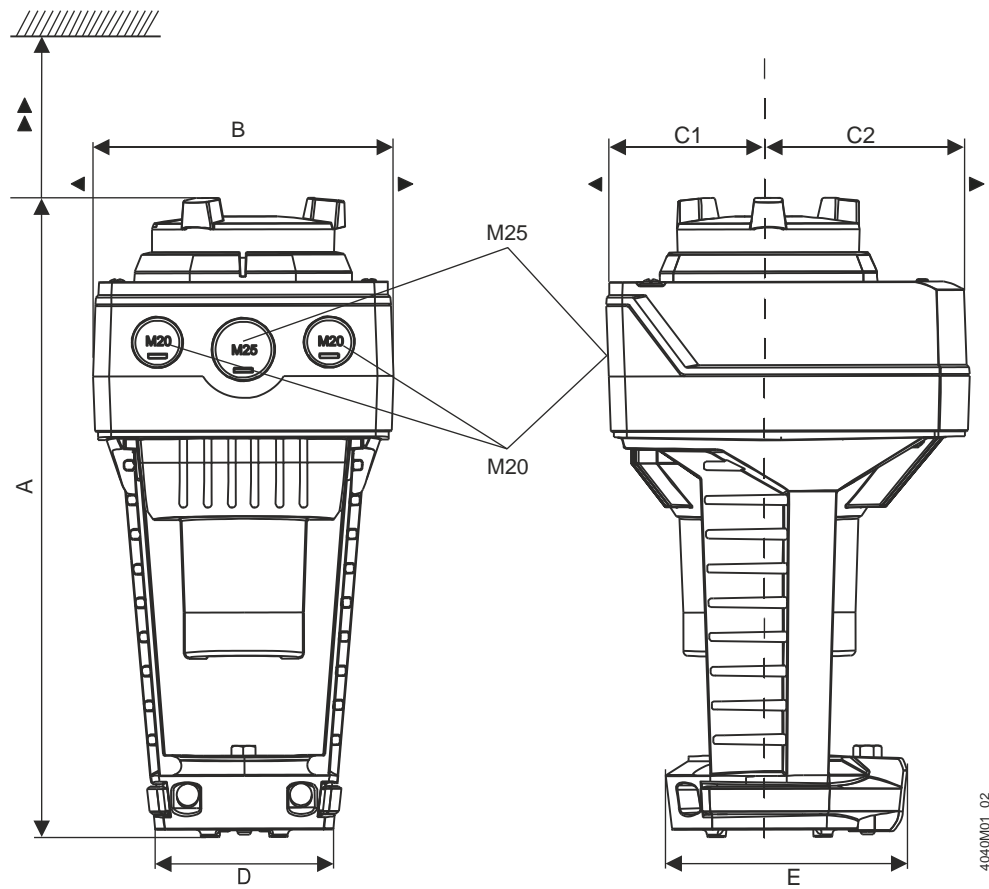


| Type | A | B | C | C1 | C2 | D | E | ▶ | ▶▶ | kg |
|---|------|-----|-----|-----|-----|----|-----|-----|-----|-------|
| | [mm] | | | | | | | | | [kg] |
| SAX..(U ¹⁾) | 242 | 124 | 150 | 68 | 82 | 80 | 100 | 100 | 200 | 1.780 |
| SAX61../MO ²⁾ | | | | | | | | | | 1.930 |
| With ASK39.1 (SAX..U ¹⁾) | 267 | 154 | 300 | 200 | 100 | | - | | | 2.010 |

¹⁾ SAX..U: For ½" tube connections (ø 21.5 mm) – 1,850 kg / 2,080 kg with ASK39.1

²⁾ Device has fixed connection cable – left cable entry occupied

External Modbus converter

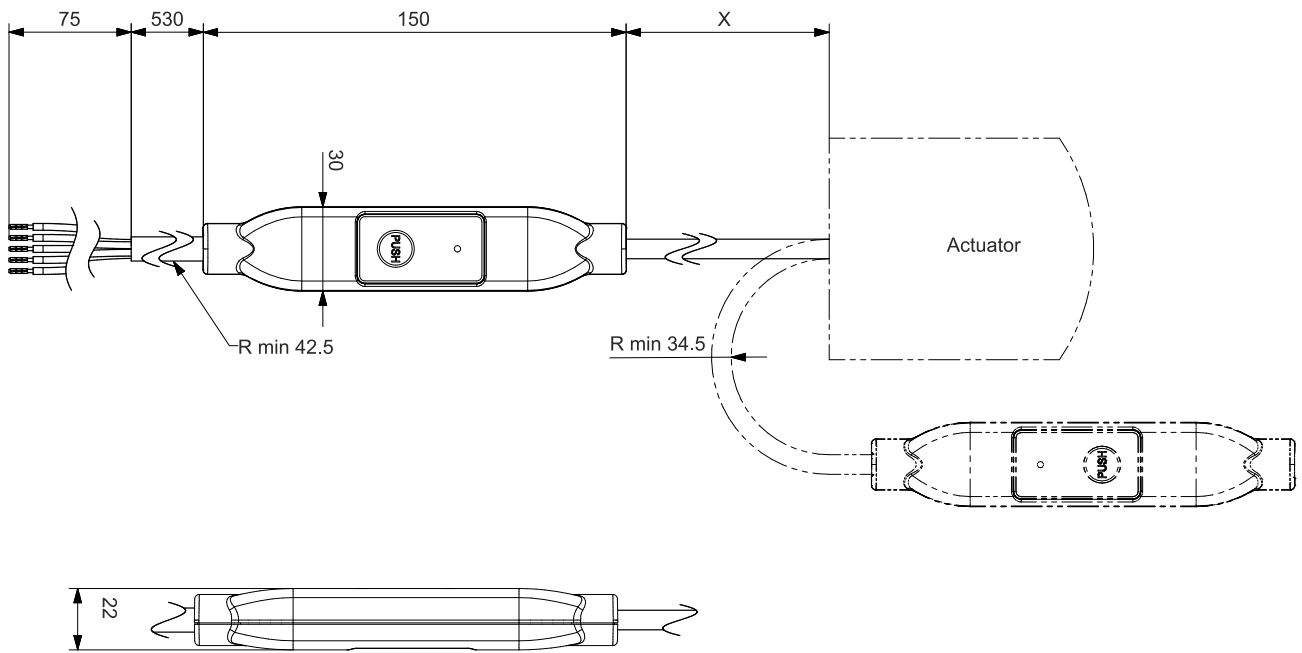

Dimensions in mm

| Type | X | kg |
|------------|------|--------------------|
| | [mm] | [kg] |
| SAX61../MO | 250 | 0.15 ¹⁾ |

¹⁾ Included in total weight.

Revision numbers

| Type | Valid from rev. no. |
|-------------|---------------------|
| SAX31.00 | ..K |
| SAX31.03 | ..K |
| SAX61.03 | ..H |
| SAX61.03/MO | ..C |
| SAX81.00 | ..H |
| SAX81.03 | ..H |

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
CH-6300 Zug
+41 58 724 2424
www.siemens.com/buildingtechnologies

© Siemens 2011
Technical specifications and availability subject to change without notice.

Document ID CE1N4501en
Edition 2024-08-27